


Stretch at	90°	45°	0°
10 lbs	1,9	4,0	2,3
10 lbs flutter	2,0	4,2	2,4
40 lbs	9,7	16,2	11,0
200 lbs			
1% elongation (lbs)	59,3		65,0

HTP[®] plus

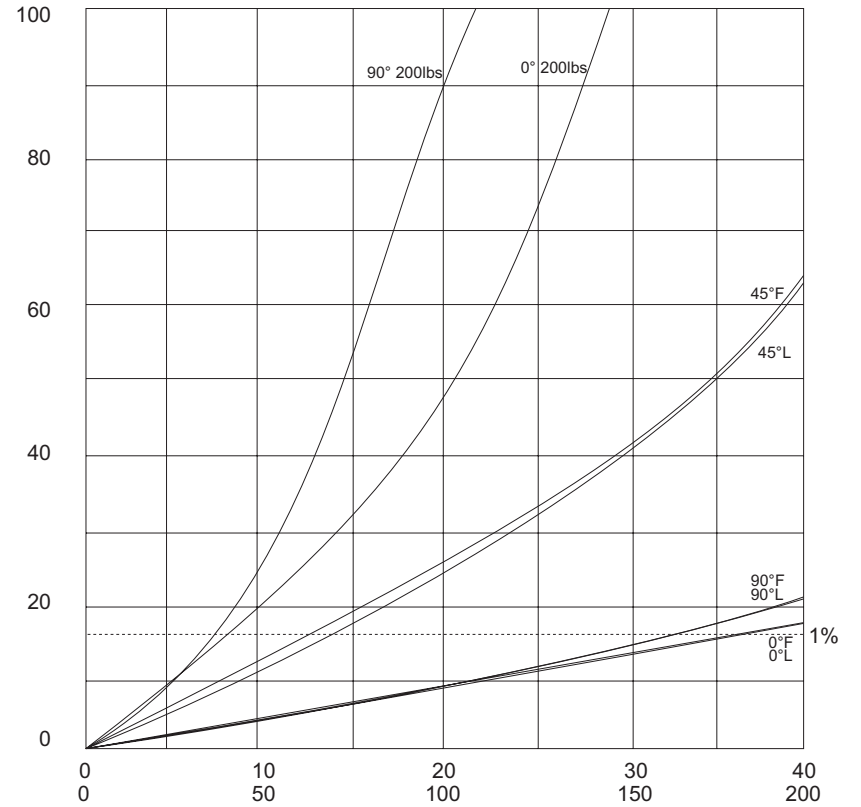

Stretch at	90°	45°	0°
10 lbs	4,6	12,7	4,8
10 lbs flutter	4,3	14,5	5,0
40 lbs	20,3	62,3	16,9
200 lbs			
1% elongation (lbs)	34,3		38,3

MTO

Style	Finish	Actual weight		Construction	Typical specs. Fill - Bias at 10 lbs	Bias range
		g/m ²	Sm-oz			
240 B 5.6 oz	HTP [®] plus	240	5,6	250 x 250	1,5 - 3,0	under 20,0 at 40 lbs
	HMTO	238	5,5		2,9 - 8,5	5,0 - 10,0
	MTO	235	5,5		4,6 - 12,7	10,0 - 15,0