


Stretch at	90°	45°	0°	HTP [®] plus
10 lbs	1,5	2,9	1,6	
10 lbs flutter	1,6	3,1	1,7	
40 lbs	5,2	11,4	6,5	
200 lbs				
1% elongation (lbs)	93,7			

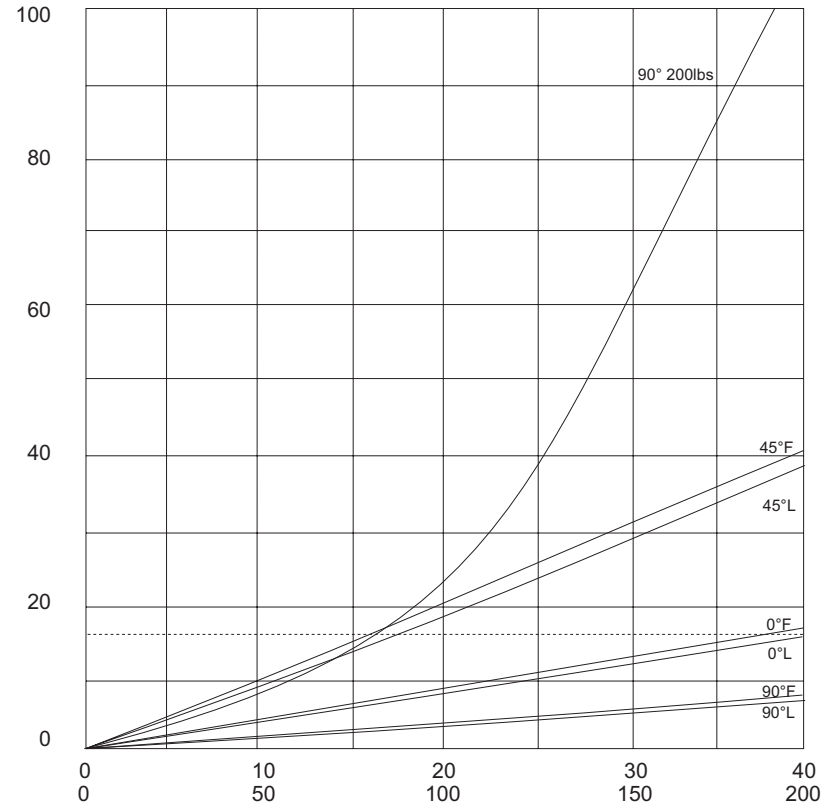

Stretch at	90°	45°	0°	MTO
10 lbs	1,9	9,4	4,3	
10 lbs flutter	2,0	10,2	4,6	
40 lbs	7,1	38,5	13,9	
200 lbs				
1% elongation (lbs)	77,8			

Style	Finish	Actual weight		Construction	Typical specs. Fill - Bias at 10 lbs	Bias range
		G/m ²	Sm-oz			
320 AP 7.3 oz	HTP [®] plus	325	7,6	300 x 500 All Purpose	1,5 - 2,9	under 15,0 at 40 lbs
	HMTO	317	7,4		1,3 - 7,7	5,0 - 8,0
	MTO	315	7,3		1,9 - 9,4	8,0 - 13,0